


ALU-Material-Lift LM/LMX W

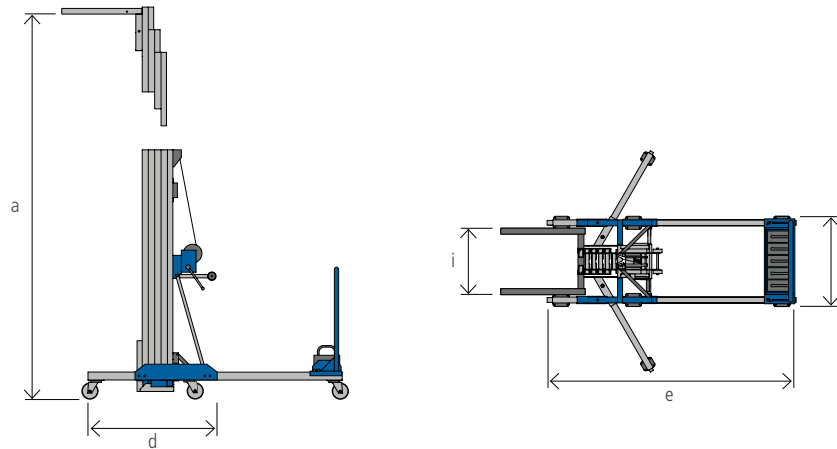

Model		LM ¹⁾	LMX ¹⁾²⁾
		620 W*	500 W*
Carrying capacity [kg]		300	500
Lifting height max. load fork top [mm]	a	6210	4800
Lifting height max. load fork bottom [mm]	b	5860	4350
Lifting height min. load fork top [mm]	l	6204	4845
Lifting height min. load fork bottom [mm]	k	5831	4360
Height front parts [mm]	m	240	240
Load fork dimensions			
Length [mm]	h	650	650
Width [mm]	i	560	560
Wall clearance load fork [mm]	j	-440	-395
Dimensions for use			
Chassis width [mm]	f	790	790
Chassis length [mm]	e	1910	1910
Width with lateral outriggers [mm]	g	1670	1920
Transport dimensions			
Height of mast [mm]	c	1890	1980
Width [mm]	f	760	760
Length [mm]	d	950	950
Net weight			
without lateral outriggers and with fixed attachments [kg]		215	253
with lateral outriggers and fixed attachments [kg]		227	266
Weight of ballast/counter weights [kg]		100	200

Böcker Maschinenwerke GmbH

Lippestr. 69-73 | 59368 Werne

Fon +49 2389 79890

info@boecker.de

www.boecker.de

¹⁾ Mechanical drive

²⁾ Lateral outriggers with spindle supports

* Lateral outriggers with fixed mounting as standard
Subject to modifications to construction, weight and dimensions.
All rights reserved for changes.

Böcker
MY WAY TO THE TOP